RNAV (GPS) RWY 26

NEIL ARMSTRONG (AXV)

WAAS	APP CRS		
CH 72907 W26A	261°	Rwy Idg	5263
		TDZE	910
		Apt Elev	913

Baro-VNAV NA when using Lima altimeter setting. DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Lima altimeter setting and increase LPV DA to 1291, LNAV/VNAV DA to 1324, and all MDA 60 feet, increase LNAV/VNAV visibility all Cats ¼ mile. Night landing: Rwy 8 NA. VDP NA when using Lima altimeter setting.

NA

MISSED APPROACH: Climb to 3000 direct ZUKEC and hold.

AWOS-3	COLUMBUS APP CON	UNICOM	
128.325	118.425 294.5	122.8 (CTAF)	122.7 L

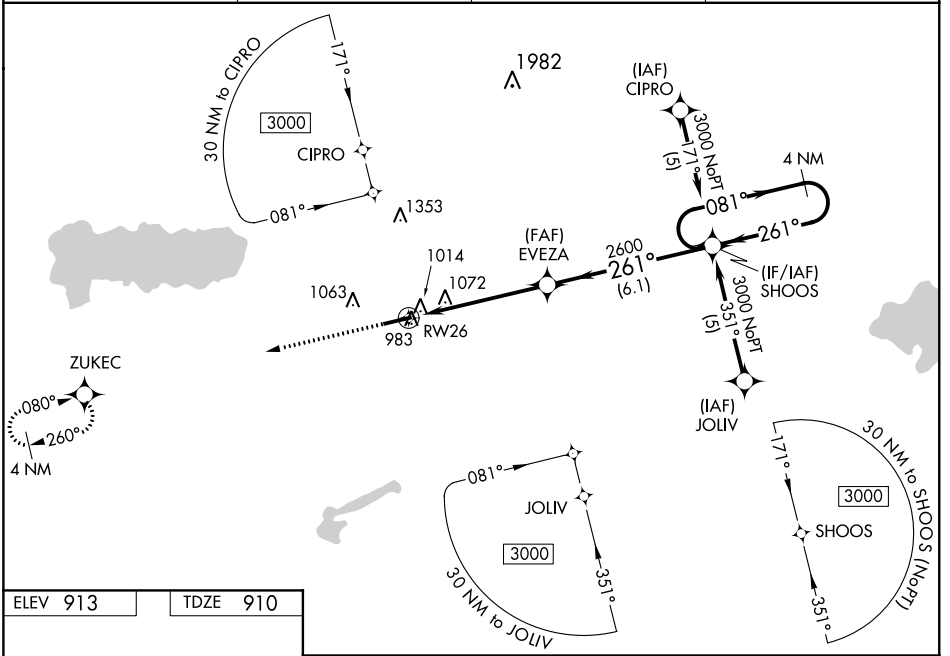

ELEV 913 TDZE 910



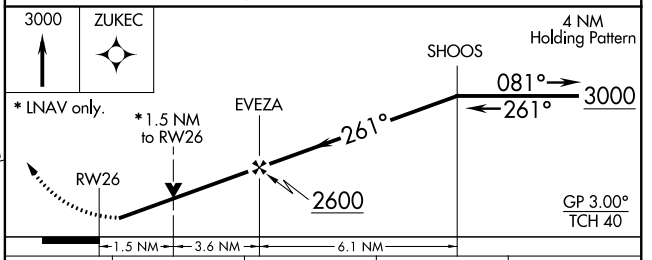

CATEGORY	A	B	C	D
LPV DA	1241-1¼ 331 (400-1¼)			NA
LNAV/VNAV DA	1274-1¼ 364 (400-1¼)			NA
LNAV MDA	1440-1 530 (600-1)		1440-1½ 530 (600-1½)	NA
CIRCLING	1440-1 527 (600-1)		1440-1½ 527 (600-1½)	NA

MIRL Rwy 8-26 L
REIL Rwy 8 and 26 L

EC-2, 08 NOV 2018 to 06 DEC 2018
EC-2, 08 NOV 2018 to 06 DEC 2018